

Internet Research Task Force (IRTF)
Request for Comments: 7122
Category: Experimental
ISSN: 2070-1721

H. Kruse
Ohio University
S. Jero
Purdue University
S. Ostermann
Ohio University
March 2014

Datagram Convergence Layers for
the Delay- and Disruption-Tolerant Networking (DTN) Bundle Protocol
and Licklider Transmission Protocol (LTP)

Abstract

This document specifies the preferred method for transporting Delay- and Disruption-Tolerant Networking (DTN) protocol data over the Internet using datagrams. It covers convergence layers for the Bundle Protocol (RFC 5050), as well as the transportation of segments using the Licklider Transmission Protocol (LTP) (RFC 5326). UDP and the Datagram Congestion Control Protocol (DCCP) are the candidate datagram protocols discussed. UDP can only be used on a local network or in cases where the DTN node implements explicit congestion control. DCCP addresses the congestion control problem, and its use is recommended whenever possible. This document is a product of the Delay-Tolerant Networking Research Group (DTNRG) and represents the consensus of the DTNRG.

Status of This Memo

This document is not an Internet Standards Track specification; it is published for examination, experimental implementation, and evaluation.

This document defines an Experimental Protocol for the Internet community. This document is a product of the Internet Research Task Force (IRTF). The IRTF publishes the results of Internet-related research and development activities. These results might not be suitable for deployment. This RFC represents the consensus of the Delay-Tolerant Networking Research Group of the Internet Research Task Force (IRTF). Documents approved for publication by the IRSG are not a candidate for any level of Internet Standard; see Section 2 of RFC 5741.

Information about the current status of this document, any errata, and how to provide feedback on it may be obtained at <http://www.rfc-editor.org/info/rfc7122>.

Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document.

Table of Contents

1.	Introduction	3
1.1.	Requirements Language	4
2.	General Recommendation	4
3.	Recommendations for Implementers	6
3.1.	How and Where to Deal with Fragmentation	6
3.1.1.	DCCP	6
3.1.2.	UDP	6
3.2.	Bundle Protocol over a Datagram Convergence Layer	6
3.2.1.	DCCP	7
3.2.2.	UDP	7
3.3.	LTP over Datagrams	7
3.3.1.	DCCP	7
3.3.2.	UDP	7
3.4.	Keep-Alive Option	7
3.5.	Checksums	8
3.5.1.	DCCP	8
3.5.2.	UDP	8
3.6.	DCCP Congestion Control Modules	8
4.	IANA Considerations	9
5.	Security Considerations	9
6.	References	9
6.1.	Normative References	9
6.2.	Informative References	10

1. Introduction

DTN communication protocols include the Bundle Protocol described in RFC 5050 [RFC5050], which provides transmission of application data blocks ("bundles") through optional intermediate custody transfer, and the Licklider Transmission Protocol (LTP) -- LTP Motivation [RFC5325], LTP Specification [RFC5326], and LTP Security [RFC5327] -- which can be used to transmit bundles reliably and efficiently over a point-to-point link. It is often desirable to test these protocols over Internet Protocol links. "Delay Tolerant Networking TCP Convergence Layer Protocol" [CLAYER] defines a method for transporting bundles over TCP. This document specifies the preferred method for transmitting either bundles or LTP blocks across the Internet using datagrams in place of TCP. Figure 1 shows the general protocol layering described in the DTN documents. DTN Applications interact with the Bundle Protocol Layer, which in turn uses a Convergence Layer to prepare a bundle for transmission. The Convergence Layer will typically rely on a lower-level protocol to carry out the transmission.

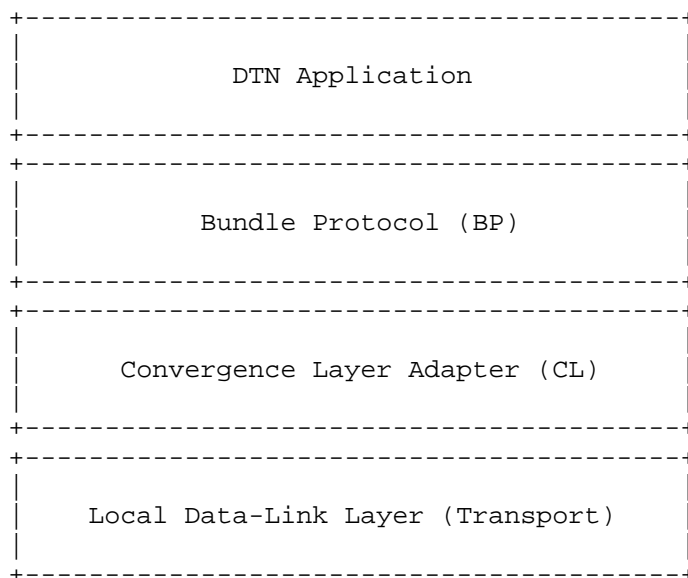


Figure 1: Generic Protocol Stack for DTN

This document provides guidance for implementation of the two protocol stacks illustrated in Figure 2. In Figure 2(a), the Convergence Layer Adapter is UDP or DCCP for direct transport of

bundles over the Internet. In Figure 2(b), the Convergence Layer Adapter is LTP, which then uses UDP or DCCP as the local data-link layer.

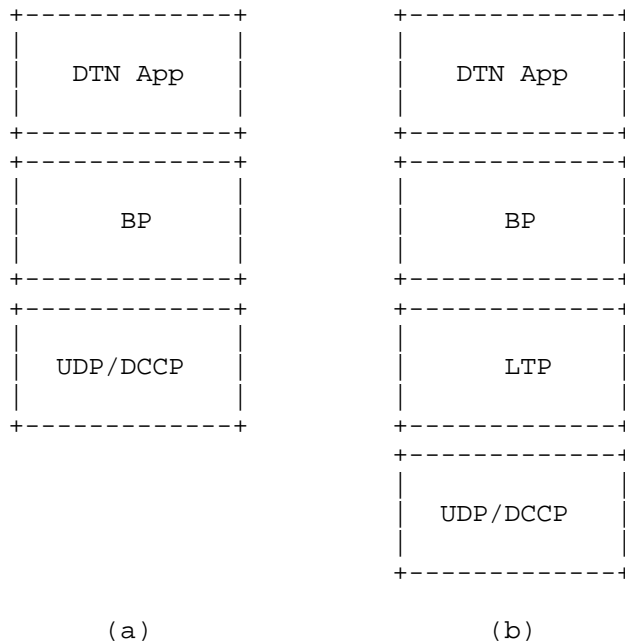


Figure 2: Protocol Stacks Addressed in this Document

1.1. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in RFC 2119 [RFC2119].

2. General Recommendation

In order to utilize DTN protocols across the Internet, whether for testing purposes or as part of a larger network path, it is necessary to encapsulate them into a standard Internet Protocol so that they travel easily across the Internet. This is particularly true for LTP, which provides no endpoint addressing. This encapsulation choice needs to be made carefully in order to avoid redundancy, since DTN protocols may provide their own reliability mechanisms.

Congestion control is vital to the continued functioning of the Internet, particularly for situations where data will be sent at arbitrarily fast data rates. The Bundle Protocol delegates provision

of reliable delivery and, implicitly, congestion control to the convergence layer used (Section 7.2 of RFC 5050 [RFC5050]). In situations where TCP will work effectively in communications between pairs of DTN nodes, use of the TCP convergence layer [CLAYER] will provide the required reliability and congestion control for transport of bundles and would be the default choice in the Internet. Alternatives such as encapsulating bundles directly in datagrams and using UDP or DCCP are not generally appropriate because they offer limited reliability and, in the case of UDP, no congestion control.

LTP, on the other hand, offers its own form of reliability. Particularly for testing purposes, it makes no sense to run LTP over a protocol like TCP that offers reliability already. In addition, running LTP over TCP would reduce the flexibility available to users, since LTP offers more control over what data is delivered reliably and what data is delivered best effort, a feature that TCP lacks. As such, it would be better to run LTP over an unreliable protocol.

One solution would be to use UDP. UDP provides no reliability, allowing LTP to manage that itself. However, UDP also does not provide congestion control. Because LTP is designed to run over fixed-rate radio links, it does provide rate control but not congestion control. Lack of congestion control in network connections is a major problem that can cause artificially high loss rates and/or serious fairness issues. Previous standards documents are unanimous in recommending congestion control for protocols to be used on the Internet, see "Congestion Control Principles" [RFC2914], "Unicast UDP Usage Guidelines" [RFC5405], and "Queue Management and Congestion Avoidance" [RFC2309], among others. RFC 5405, in particular, calls congestion control "vital" for "applications that can operate at higher, potentially unbounded data rates". Therefore, any Bundle Protocol implementation permitting the use of UDP to transport LTP segments or bundles outside an isolated network for the transmission of any non-trivial amounts of data MUST implement congestion control consistent with RFC 5405.

Alternatively, the Datagram Congestion Control Protocol (DCCP) [RFC4340] was designed specifically to provide congestion control without reliability for those applications that traverse the Internet but do not desire to retransmit lost data. As such, it is RECOMMENDED that, if possible, DCCP be used to transport LTP segments across the Internet.

3. Recommendations for Implementers

3.1. How and Where to Deal with Fragmentation

The Bundle Protocol allows bundles with sizes limited only by node resource constraints. In IPv4, the maximum size of a UDP datagram is nearly 64 KB. In IPv6, when using jumbograms [RFC2675], UDP datagrams can technically be up to 4 GB in size [RFC2147], although this option is rarely used. (Note: RFC 2147 was obsoleted by RFC 2675.) It is well understood that sending large IP datagrams that must be fragmented by the network has enormous efficiency penalties [Kent87]. The Bundle Protocol specification provides a bundle fragmentation concept [RFC5050] that allows a large bundle to be divided into bundle fragments. If the Bundle Protocol is being encapsulated in DCCP or UDP, it therefore SHOULD create each fragment of sufficiently small size that it can then be encapsulated into a datagram that will not need to be fragmented at the IP layer.

IP fragmentation can be avoided by using IP Path MTU Discovery [RFC1191] [RFC1981], which depends on the deterministic delivery of ICMP Packet Too Big (PTB) messages from routers in the network. To bypass a condition referred to as a black hole [RFC2923], a newer specification is available in [RFC4821] to determine the IP Path MTU without the use of PTB messages. This document does not attempt to recommend one fragmentation avoidance mechanism over another; the information in this section is included for the benefit of implementers.

3.1.1. DCCP

Because DCCP implementations are not required to support IP fragmentation and are not allowed to enable it by default, a DCCP Convergence Layer (we will use "CL" from here on) MUST NOT accept data segments that cannot be sent as a single MTU-sized datagram.

3.1.2. UDP

When an LTP CL is using UDP for datagram delivery, it SHOULD NOT create segments that will result in UDP datagrams that will need to be fragmented, as discussed above.

3.2. Bundle Protocol over a Datagram Convergence Layer

In general, the use of the Bundle Protocol over a datagram CL is discouraged in IP networks. Bundles can be of (almost) arbitrary length, and the Bundle Protocol does not include an effective retransmission mechanism. Whenever possible, the Bundle Protocol SHOULD be operated over the TCP Convergence Layer or over LTP.

If a datagram CL is used for transmission of bundles, every datagram MUST contain exactly one bundle or 4 octets of zero bits as a keep-alive. Bundles that are too large for the path MTU SHOULD be fragmented and reassembled at the Bundle Protocol layer to prevent IP fragmentation.

3.2.1. DCCP

The DCCP CL for Bundle Protocol use SHOULD use the IANA-assigned port 4556/DCCP and service code 1685351985; the use of other port numbers and service codes is implementation specific.

3.2.2. UDP

The UDP CL for Bundle Protocol use SHOULD use the IANA-assigned port 4556/UDP; the use of other port numbers is implementation specific.

3.3. LTP over Datagrams

LTP is designed as a point-to-point protocol within DTN, and it provides intrinsic acknowledgement and retransmission facilities. LTP segments are transported over a "local data-link layer" (RFC 5325 [RFC5325]); we will use the term "transport" from here on. Transport of LTP using datagrams is an appropriate choice. When a datagram transport is used to send LTP segments, every datagram MUST contain exactly one LTP segment or 4 octets of zero bits as a keep-alive. LTP MUST perform segmentation in such a way as to ensure that every LTP segment fits into a single packet which will not require IP fragmentation as discussed above.

3.3.1. DCCP

The DCCP transport for LTP SHOULD use the IANA-assigned port 1113/DCCP and service code 7107696; the use of other port numbers and service codes is implementation specific.

3.3.2. UDP

The UDP transport for LTP SHOULD use the IANA-assigned port 1113/UDP; the use of other port numbers is implementation specific.

3.4. Keep-Alive Option

It may be desirable for a UDP or DCCP CL or transport to send "keep-alive" packets during extended idle periods. This may be needed to refresh a contact table entry at the destination, or to maintain an address mapping in a NAT or a dynamic access rule in a firewall. Therefore, the CL or transport MAY send a datagram containing exactly

4 octets of zero bits. The CL or transport receiving such a packet MUST discard this packet. The receiving CL or transport may then perform local maintenance of its state tables; these maintenance functions are not covered in this document. Note that packets carrying bundles or segments will always contain more than 4 octets of information (either the bundle or the LTP header); keep-alive packets will therefore never be mistaken for actual data packets. If UDP or DCCP is being used for communication in both directions between a pair of bundle agents, transmission and processing of keep-alives in the two directions occurs independently. Keep-alive intervals SHOULD be configurable, SHOULD default to 15 seconds, and MUST NOT be configured shorter than 15 seconds.

3.5. Checksums

Both the core Bundle Protocol specification and core LTP specification assume that they are transmitting over an erasure channel, i.e., a channel that either delivers packets correctly or not at all.

3.5.1. DCCP

A DCCP transmitter MUST, therefore, ensure that the entire packet is checksummed by setting the Checksum Coverage to zero. Likewise, the DCCP receiver MUST ignore all packets with partial checksum coverage.

3.5.2. UDP

A UDP transmitter, therefore, MUST NOT disable UDP checksums, and the UDP receiver MUST NOT disable the checking of received UDP checksums.

Even when UDP checksums are enabled, a small probability of UDP packet corruption remains. In some environments, it may be acceptable for LTP or the Bundle Protocol to occasionally receive corrupted input. In general, however, a UDP implementation SHOULD use optional security extensions available in the Bundle Protocol or LTP to protect against message corruption.

3.6. DCCP Congestion Control Modules

DCCP supports pluggable congestion control modules in order to optimize its behavior to particular environments. The two most common congestion control modules (CCIDs) are TCP-like Congestion Control (CCID2) [RFC4341] and TCP-Friendly Rate Control (CCID3) [RFC4342]. TCP-like Congestion Control is designed to emulate TCP's congestion control as much as possible. It is recommended for applications that want to send data as quickly as possible, while TCP-Friendly Rate Control is aimed at applications that want to avoid

sudden changes in sending rate. DTN use cases seem to fit more into the first case, so DCCP CL's and transports SHOULD use TCP-like Congestion Control (CCID2) by default.

4. IANA Considerations

Port number assignments 1113/UDP and 4556/UDP have been registered with IANA. The assignment for 1113/UDP referenced [RFC5326]; this entry has been changed to add the present document in addition to [RFC5326]. The assignment of 4556/UDP had no reference; this entry has been changed to point to the present document. The service name for 4556/UDP has been changed from dtn-bundle-udp to dtn-bundle. Port number 1113/DCCP (ltp-deepspace) with Service Code 7107696 has been assigned for the transport of LTP. Port number 4556/DCCP (dtn-bundle) with Service Code 1685351985 has been assigned for the transport of bundles. The port number assignment for 4556/TCP is addressed in the [CLAYER] document.

5. Security Considerations

This memo describes the use of datagrams to transport DTN application data. Hosts may be in the position of having to accept and process packets from unknown sources; the DTN Endpoint ID can be discovered only after the bundle has been retrieved from the DCCP or UDP packet. Hosts SHOULD use authentication methods available in the DTN specifications to prevent malicious hosts from inserting unknown data into the application.

Hosts need to listen for and process DCCP or UDP data on the known LTP or Bundle Protocol ports. A denial-of-service scenario exists where a malicious host sends datagrams at a high rate, forcing the receiving hosts to use their resources to process and attempt to authenticate this data. Whenever possible, hosts SHOULD use IP address filtering to limit the origin of packets to known hosts.

6. References

6.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997.
- [RFC2147] Borman, D., "TCP and UDP over IPv6 Jumbograms", RFC 2147, May 1997.
- [RFC2675] Borman, D., Deering, S., and R. Hinden, "IPv6 Jumbograms", RFC 2675, August 1999.

- [RFC4340] Kohler, E., Handley, M., and S. Floyd, "Datagram Congestion Control Protocol (DCCP)", RFC 4340, March 2006.
- [RFC4341] Floyd, S. and E. Kohler, "Profile for Datagram Congestion Control Protocol (DCCP) Congestion Control ID 2: TCP-like Congestion Control", RFC 4341, March 2006.
- [RFC5050] Scott, K. and S. Burleigh, "Bundle Protocol Specification", RFC 5050, November 2007.
- [RFC5325] Burleigh, S., Ramadas, M., and S. Farrell, "Licklider Transmission Protocol - Motivation", RFC 5325, September 2008.
- [RFC5326] Ramadas, M., Burleigh, S., and S. Farrell, "Licklider Transmission Protocol - Specification", RFC 5326, September 2008.
- [RFC5327] Farrell, S., Ramadas, M., and S. Burleigh, "Licklider Transmission Protocol - Security Extensions", RFC 5327, September 2008.

6.2. Informative References

- [CLAYER] Demmer, M., Ott, J., and S. Perreault, "Delay Tolerant Networking TCP Convergence Layer Protocol", Work in Progress, January 2014.
- [Kent87] Kent, C. and J. Mogul, "Fragmentation considered harmful", SIGCOMM '87, Proceedings of the ACM workshop on Frontiers in computer communications technology, 1987, <<http://doi.acm.org/10.1145/55482.55524>>.
- [RFC1191] Mogul, J. and S. Deering, "Path MTU discovery", RFC 1191, November 1990.
- [RFC1981] McCann, J., Deering, S., and J. Mogul, "Path MTU Discovery for IP version 6", RFC 1981, August 1996.
- [RFC2309] Braden, B., Clark, D., Crowcroft, J., Davie, B., Deering, S., Estrin, D., Floyd, S., Jacobson, V., Minshall, G., Partridge, C., Peterson, L., Ramakrishnan, K., Shenker, S., Wroclawski, J., and L. Zhang, "Recommendations on Queue Management and Congestion Avoidance in the Internet", RFC 2309, April 1998.
- [RFC2914] Floyd, S., "Congestion Control Principles", BCP 41, RFC 2914, September 2000.

- [RFC2923] Lahey, K., "TCP Problems with Path MTU Discovery", RFC 2923, September 2000.
- [RFC4342] Floyd, S., Kohler, E., and J. Padhye, "Profile for Datagram Congestion Control Protocol (DCCP) Congestion Control ID 3: TCP-Friendly Rate Control (TFRC)", RFC 4342, March 2006.
- [RFC4821] Mathis, M. and J. Heffner, "Packetization Layer Path MTU Discovery", RFC 4821, March 2007.
- [RFC5405] Eggert, L. and G. Fairhurst, "Unicast UDP Usage Guidelines for Application Designers", BCP 145, RFC 5405, November 2008.

Authors' Addresses

Hans Kruse
Ohio University
31 S. Court Street, Rm 150
Athens, OH 45701
United States

Phone: +1 740 593 4891
EMail: kruse@ohio.edu

Samuel Jero
Purdue University
West Lafayette, IN 47907
United States

EMail: sjero@purdue.edu

Shawn Ostermann
Ohio University
Stocker Engineering Center
Athens, OH 45701
United States

Phone: +1 740 593 1566
EMail: ostermann@eecs.ohiou.edu